

TECHNICAL DATA

REVERSIBLE VIBRATORY PLATES

BPR 25/40, BPR 25/40 D



Robust and reliable
Best component protection




Precise and save to operate
Comfortable control lever



Simple and safe transport
Transport wheels (optional)

Shipping dimensions in m3

| | |
|--------------------|-------|
| BPR 25/40 | 0,385 |
| BPR 25/40 D | 0,432 |

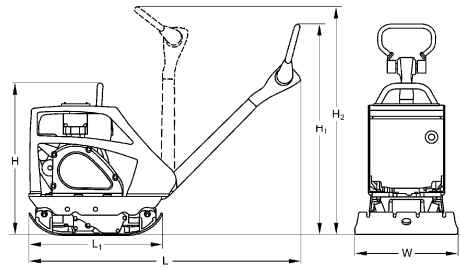

Standard Equipment

- Protective engine covering
- Comfortable control lever
- Low vibration steering rod
- Height adjustable steering rod
- Steering rod lockable in transport and working position
- Vibration and throttle regulation on the steering rod
- Highly wear-resistant, powder-coated base plate
- Fully protected V-belt
- Recoil starter
- Back-up drive protection
- Automatic shutdown at low oil level (BPR25/40)
- Automatic decompression (BPR25/40D)
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (+13kg)
- Tool kit
- Special painting
- Plastic mat
- Transport wheels, puncture-proof (+4kg)
- Service Kit
- US Version EPA 4 NRTC (BPR25/40D)
- TOUGH WARRANTY

Dimensions in mm

| | H | H1 | H2 | L | L1 | W |
|--------------------|-----|-----|------|------|-----|-----|
| BPR 25/40 | 660 | 930 | 1080 | 1460 | 650 | 400 |
| BPR 25/40 D | 740 | 930 | 1080 | 1460 | 650 | 400 |

Technical Data

Weights

| | | |
|---------------------------------|----|-----|
| Operating weight CECE (W) | kg | 135 |
| Basic weight | kg | 132 |

Dimensions

| | | | |
|---|----|-------|-------|
| Basic working width | mm | 400 | 400 |
| Lowest passing height | mm | 660 | 740 |
| Min. height w. steering in top position | mm | 930 | 930 |
| Max. height w. steering in top position | mm | 1.250 | 1.250 |

Driving Characteristics

| | | | |
|---|-------|----|----|
| Working speed, max. | m/min | 25 | 25 |
| Max. gradeability (dep. on soil con.) | % | 30 | 30 |

Drive

| | | | |
|--|-------|-----------------|---------|
| Engine manufacturer | | Honda | Hatz |
| Type | | GX 160 | 1B20 |
| Emission stage | | StageV/CARB P.3 | Stage V |
| Cooling | | air | air |
| Number of cylinders | | 1 | 1 |
| Performance SAE J 1349 | kW | 3,6 | |
| Performance ISO 3046 | kW | | 3,1 |
| Speed | min-1 | 3.600 | 3.000 |
| Drive system | | mech. | mech. |
| Fuel | | Gasoline | Diesel |
| Fuel comsump. aver. during operation | l/h | 1,1 | 0,7 |

Exciter system

| | | | |
|-------------------------|----|------|------|
| Frequency | Hz | 85 | 85 |
| Centrifugal force | kN | 25 | 25 |
| Amplitude | mm | 1,55 | 1,55 |

Capacities

| | | | |
|-------------|---|------|------|
| Fuel | l | 3,1 | 3,0 |
| Water | l | 12,0 | 12,0 |

Technical modifications reserved. Machines may be shown with options.



PRE 692 65 010

300120 Sa04

BOMAG
 Hellerwald
 D-56154 Boppard
 P.O. Box 5162
 Tel. (0)6742 - 1000
 Fax (0)6742 - 3090

